

Jin-Soo Kim  
([jinsoo.kim@snu.ac.kr](mailto:jinsoo.kim@snu.ac.kr))

Systems Software &  
Architecture Lab.

Seoul National University

Fall 2025


# Hard Disk Drives (HDDs)



# Secondary Storage

- Anything that is outside of “primary memory”
  - Does not permit direct execution of instructions or data retrieval via machine load/instructions
  - Abstracted as an array of sectors
  - Each sector is typically 512 bytes or 4096 bytes
- HDD (Hard Disk Drive) Characteristics
  - It's large: 100 GB or more
  - It's cheap: 8TB SATA3 hard disk costs 170,000won (as of May 2024)
  - It's persistent: data survives power loss
  - It's slow: milliseconds to access

# HDD Architecture

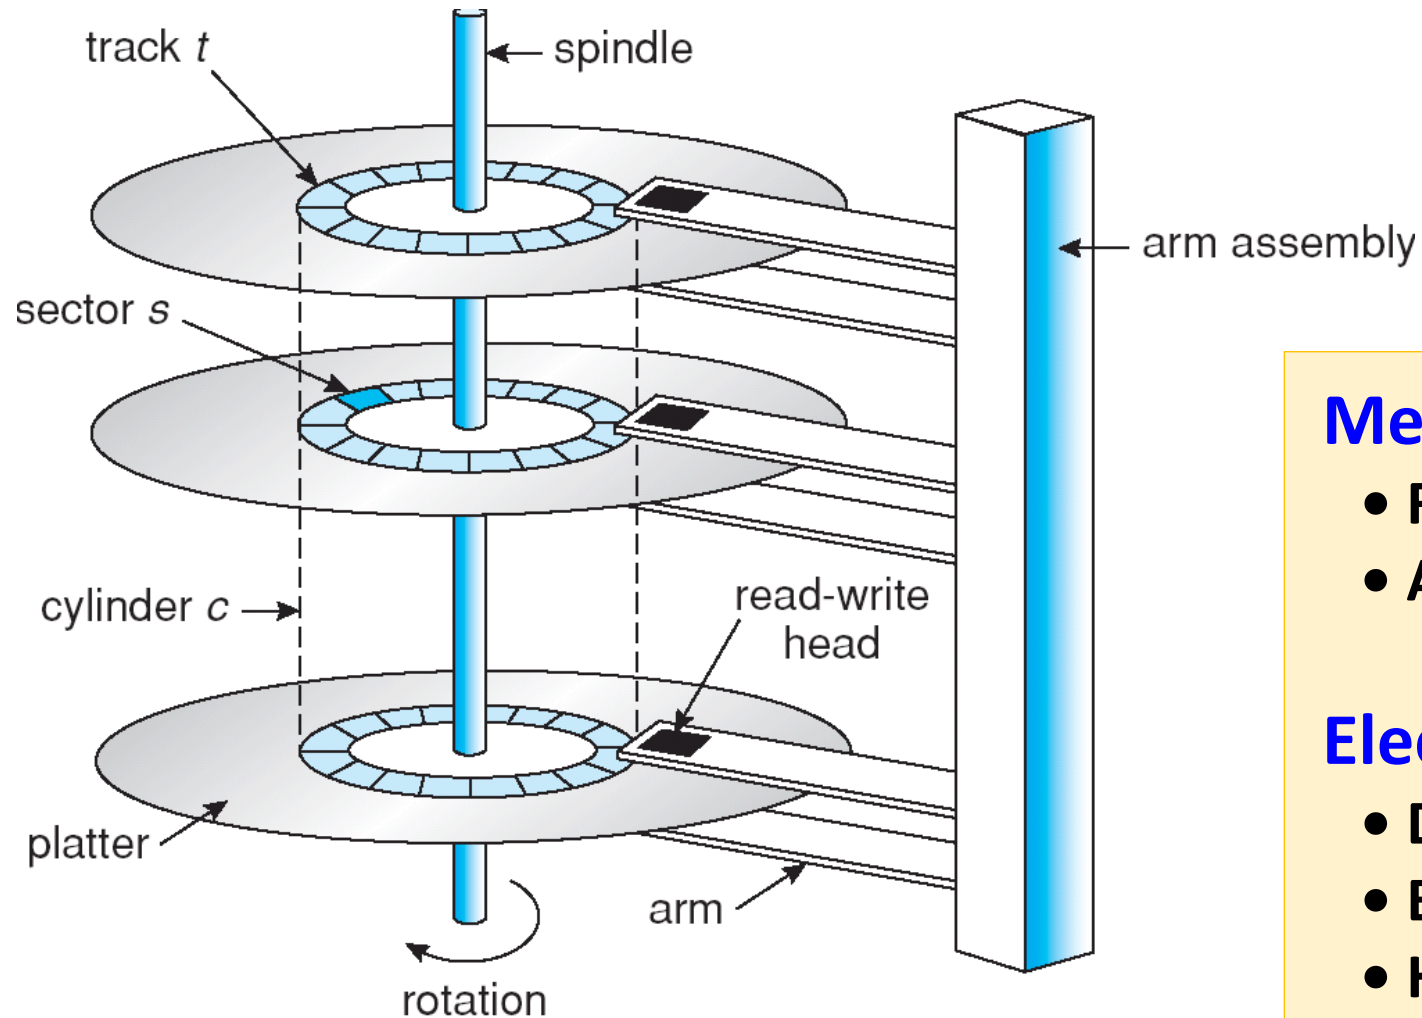

## Mechanical

- Rotating disks
- Arm assembly


## Electronics

- Disk controller
- Buffer
- Host interface

# A Modern HDD

- Seagate IronWolf ST22000NT001 (22TB)
  - 20 Heads, 10 Discs
  - Max. recording density: 2552K BPI (bits/inch)
  - Avg. track density: 512K TPI (tracks/inch)
  - Avg. areal density: 1260 Gbits/sq.inch
  - Spindle speed: 7200 rpm (8.3ms / rotation)
  - Internal cache buffer: 512 MB
  - Average latency: 4.16 ms
  - Max. I/O data transfer rate: 600 MB/s (SATA3)
  - Max. sustained data transfer rate: 285 MB/s
  - Power-on to ready: < 30.0 sec


# HDD Scaled 1 Million Times

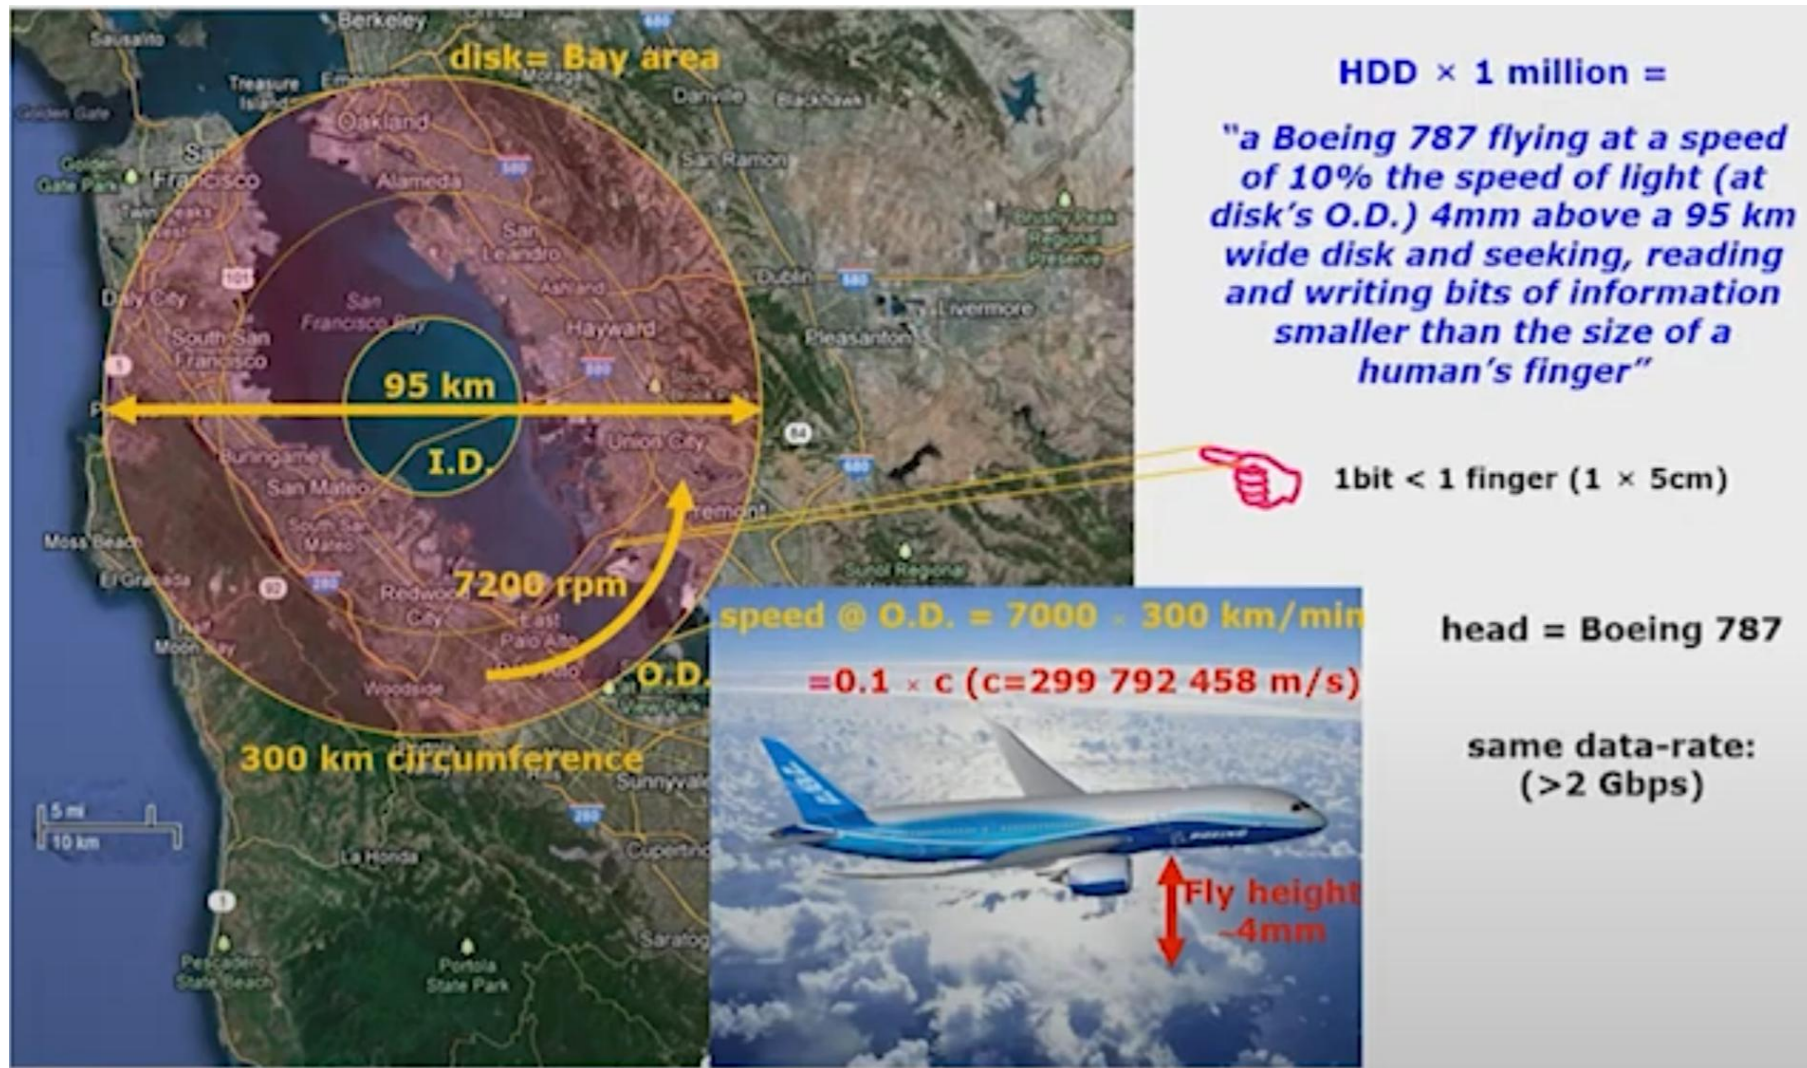

Source: Barry Stipe, "The Magnetic Hard Disk Drive – How Information is Stored in the Cloud," APS March Meeting, 2018.

# Interfacing with HDDs

- Cylinder-Head-Sector (CHS) scheme
  - Each block is addressed by <Cylinder #, Head #, Sector #>
  - The OS needs to know all disk “geometry” parameters
- Logical block addressing (LBA) scheme
  - First introduced in SCSI
  - Disk is abstracted as a logical array of blocks [0, ..., N-1]
  - Address a block with a “logical block address (LBA)”
  - Disk maps an LBA to its physical location
  - Physical parameters of a disk are hidden from OS

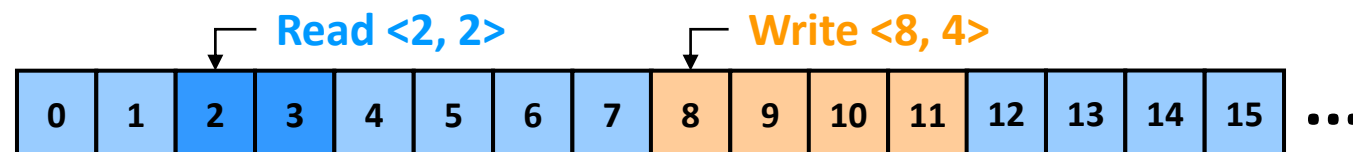

# HDD Performance Factors

- Seek time ( $T_{seek}$ )
  - Moving the disk arm to the correct cylinder
  - Depends on the cylinder distance (not purely linear cost)
  - Average seek time is roughly one-third of the full seek time
- Rotational delay ( $T_{rotation}$ )
  - Waiting for the sector to rotate under head
  - Depends on rotations per minute (RPM)
  - 5400, 7200 RPM common, 10K or 15K RPM for servers
- Transfer time ( $T_{transfer}$ )
  - Transferring data from surface into disk controller, sending it back to the host

# HDD Performance Comparison

	Cheetah 15K.5	Barracuda
Capacity	300 GB	1 TB
RPM	15,000	7,200
Avg. Seek	4 ms	9 ms
Max Transfer	125 MB/s	105 MB/s
Platters	4	4
Cache	16MB	16/32 MB
Interface	SCSI	SATA
Random Read (4 KB)	$T_{seek} = 4\text{ms}$ $T_{rotation} = 60 / 15000 / 2 = 2\text{ms}$ $T_{transfer} = 4\text{KB} / 125\text{MB} = 32\mu\text{s}$ $R_{I/O} \approx 4\text{KB} / 6\text{ms} = 0.66 \text{ MB/s}$	$T_{seek} = 9\text{ms}$ $T_{rotation} = 60 / 7200 / 2 = 4.2\text{ms}$ $T_{transfer} = 4\text{KB} / 105\text{MB} = 37\mu\text{s}$ $R_{I/O} \approx 4\text{KB} / 13.2\text{ms} = 0.31 \text{ MB/s}$
Sequential Read (100 MB)	$T_{transfer} = 100\text{MB} / 125\text{MB} = 0.8\text{s}$ $R_{I/O} \approx 100\text{MB} / 0.8\text{s} = 125 \text{ MB/s}$	$T_{transfer} = 100\text{MB} / 105\text{MB} = 0.95\text{s}$ $R_{I/O} \approx 100\text{MB} / 0.95\text{s} = 105 \text{ MB/s}$




# Disk Scheduling

- Given a stream of I/O requests, in what order should they be served?
  - Much different than CPU scheduling
  - Seeks are so expensive
  - Position of disk head relative to request position matters more than length of a job
- Work conserving schedulers
  - Always try to do work if there's work to be done
- Non-work-conserving schedulers
  - Sometimes, it's better to wait instead if system anticipates another request will arrive

# FCFS

- First-Come First-Served (= do nothing)

- Reasonable when load is low
- Long waiting times for long request queues

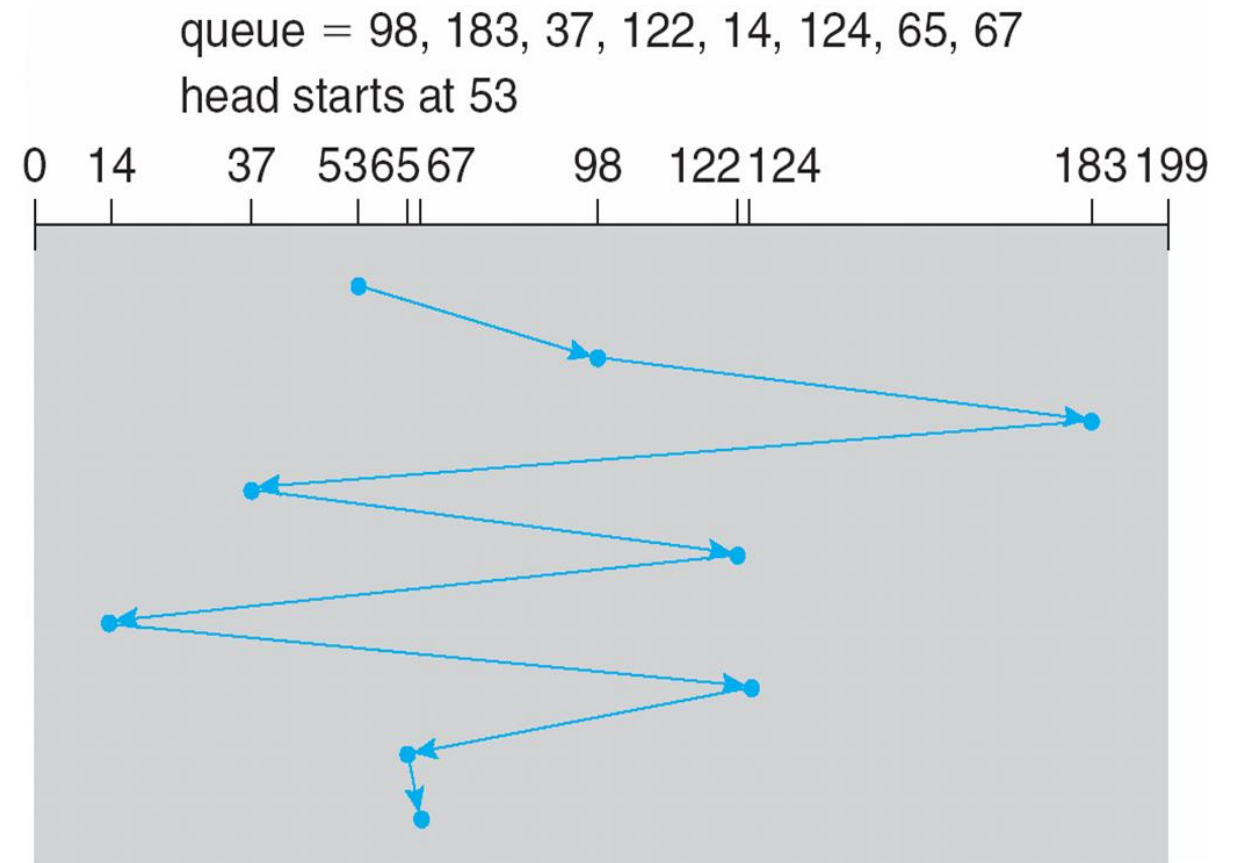


# SSTF

## ■ Shortest Seek Time First

- Minimizes arm movement (seek time)
- Unfairly favors middle blocks
- May cause starvation

- Nearest-Block-First (NBF) when the drive geometry is not available to the host OS

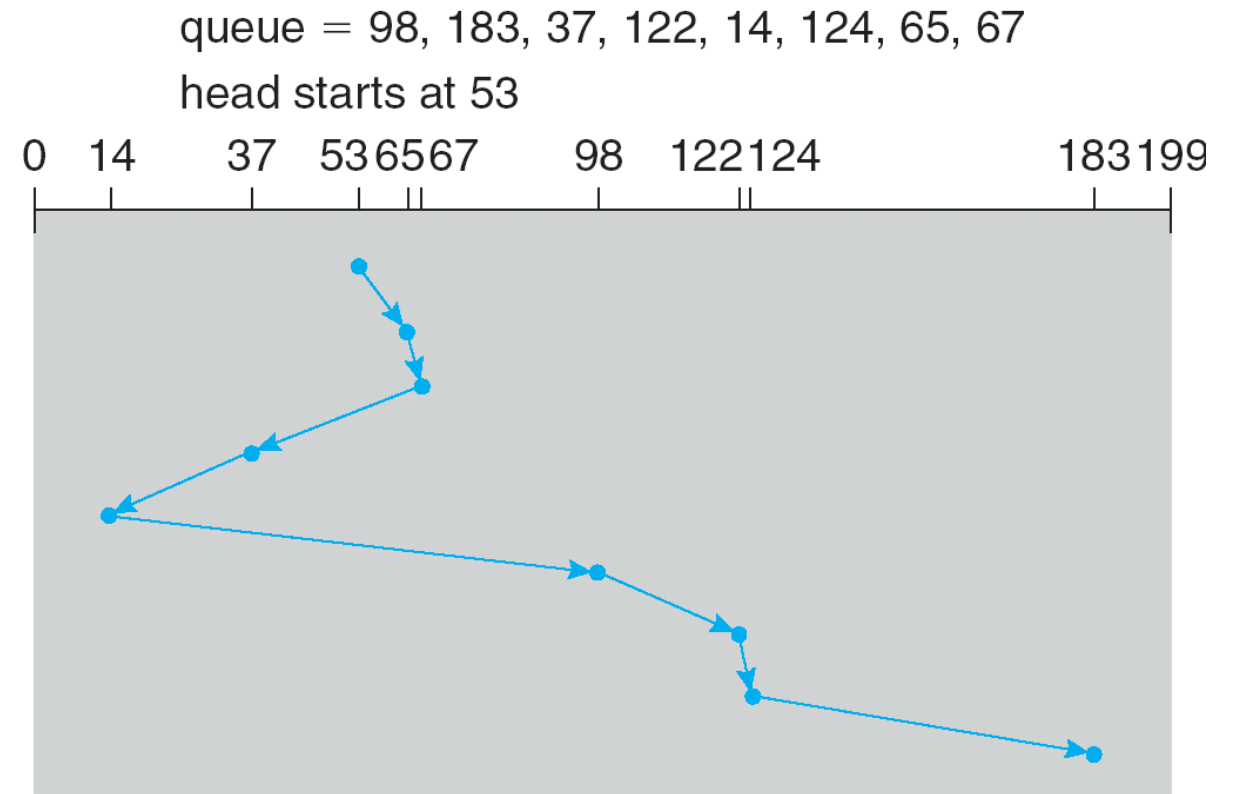


# SCAN

## ■ SCAN

- Service requests in one direction until done, then reverse
- Skews wait times non-uniformly
- Favors middle blocks

## ■ F-SCAN

- Freezes the queue when it is doing a sweep
- Avoids starvation of far-away requests

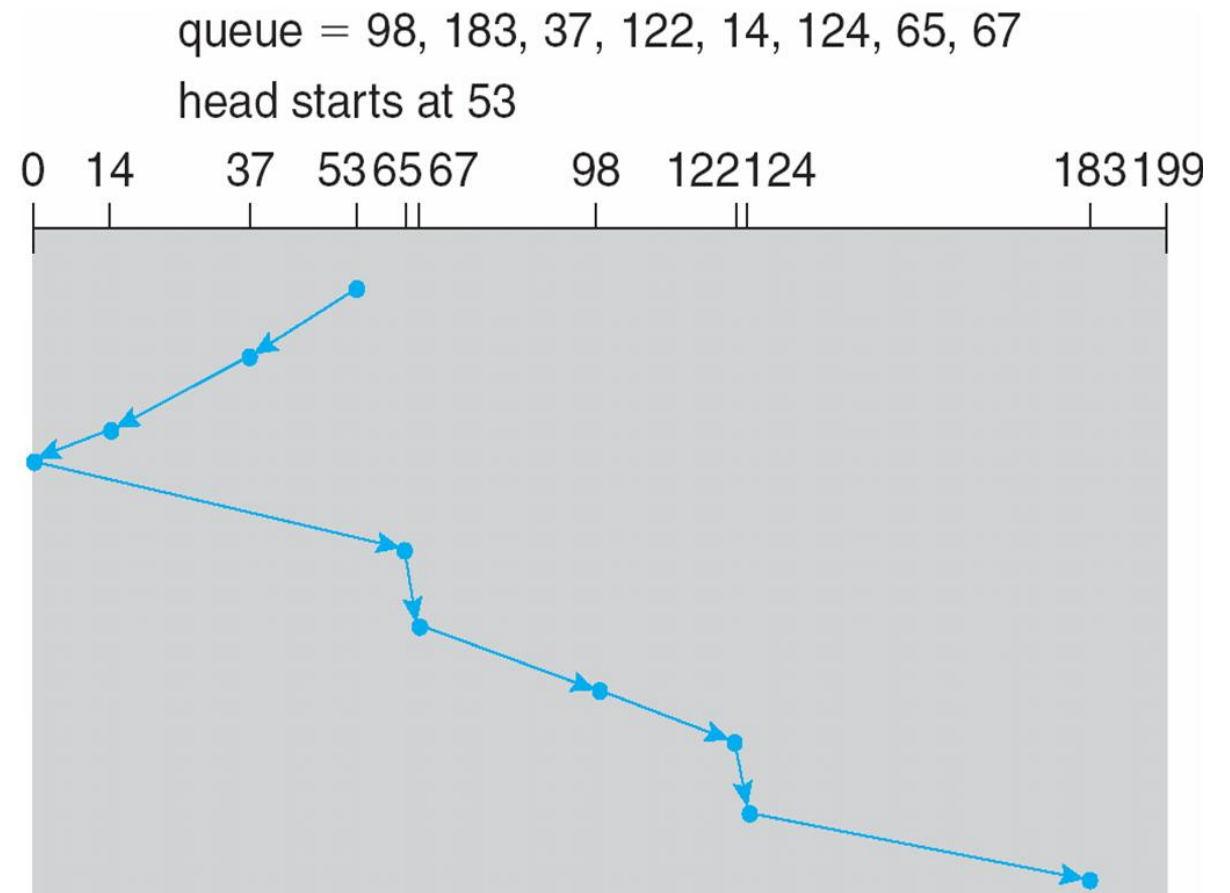


# C-SCAN

## ■ Circular SCAN

- Like SCAN, but only goes in one direction (e.g., typewriter)
- Uniform wait times

## ■ SCAN and C-SCAN are referred to as the “                    ” algorithm

- Both do not consider rotation

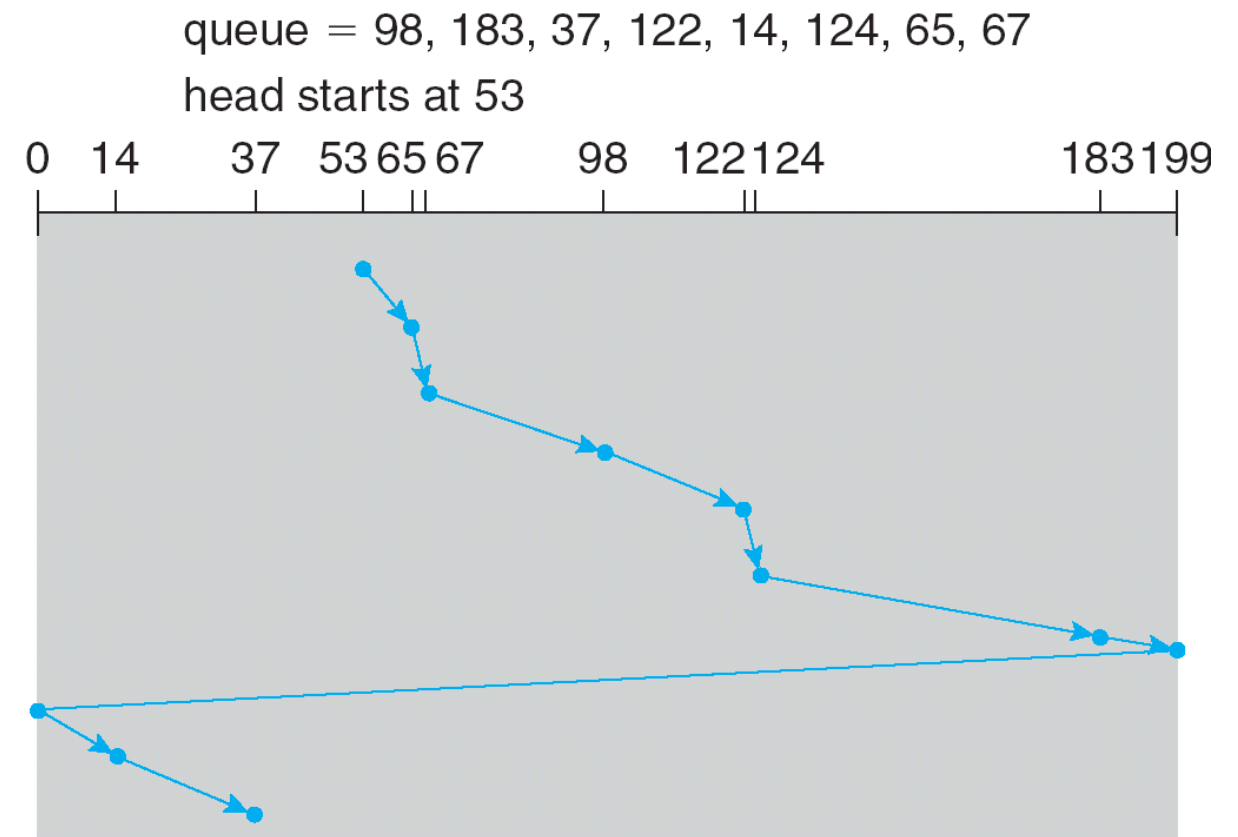

# Modern Disk Scheduling

- I/O scheduler in the host OS
  - Improve overall disk throughput
    - Merge requests to reduce the number of requests
    - Sort requests to reduce disk seek time
  - Prevent starvation
  - Provide fairness among different processes
- Disk drive
  - Disk has multiple outstanding requests
    - e.g., SATA NCQ (Native Command Queueing): up to 32 requests
  - Disk schedules requests using its knowledge of head position and track layout
    - e.g., SPTF (Shortest Positioning Time First): consider rotation as well

# Summary

- HDD is a block device
- Modern HDD interface is based on LBA (Logical Block Addressing)
  - SATA, SAS
- Modern disks support command queueing and scheduling
- “Unwritten contract” of HDDs
  - Sequential accesses are much better than random accesses
  - Distant LBAs lead to longer seek time
  - Data written is equal to data issued (no write amplification)
  - Media does not wear down
  - Storage devices are passive with little background activity