

Jin-Soo Kim
(jinsoo.kim@snu.ac.kr)

Systems Software &
Architecture Lab.
Seoul National University

Spring 2026

System Calls



System Calls

- OS defines a set of system calls
 - Programming interface to the services provided by OS
 - OS protects the system by rejecting illegal requests
 - OS may impose a quota on a certain resource
 - OS may consider fairness while sharing a resource
- A system call is a _____ **procedure call**
 - System call routines are in the OS code
 - Executed in the kernel mode
 - On entry, user mode → kernel mode switch
 - On exit, CPU mode is changed back to the user mode

System Calls Example

- POSIX vs. Win32

Category	POSIX	Win32	Description
Process Management	fork	CreateProcess	Create a new process
	waitpid	WaitForSingleObject	Wait for a process to exit
	execve	(none)	CreateProcess = fork + exec
	exit	ExitProcess	Terminate execution
	kill	(none)	Send a signal
File Management	open	CreateFile	Create a file or open an existing file
	close	CloseHandle	Close a file
	read	ReadFile	Read data from a file
	write	WriteFile	Write data to a file
	lseek	SetFilePointer	Move the file pointer
	stat	GetFileAttributesEx	Get various file attributes
	chmod	(none)	Change the file access permission
File System Management	mkdir	CreateDirectory	Create a new directory
	rmdir	RemoveDirectory	Remove an empty directory
	link	(none)	Make a link to a file
	unlink	DeleteFile	Destroy an existing file
	chdir	SetCurrentDirectory	Change the current working directory
	mount	(none)	Mount a file system


OS Trap

- There must be a special “trap” instruction that:
 - Causes an exception, which invokes a kernel handler
 - Passes a parameter indicating which system call to invoke
 - Saves caller’s state (registers, mode bits)
 - Returns to user mode when done with restoring its state
 - OS must verify caller’s parameters (e.g., pointers)

Examples:


SYSCALL instruction (x86_64)

ECALL instruction (RISC-V)

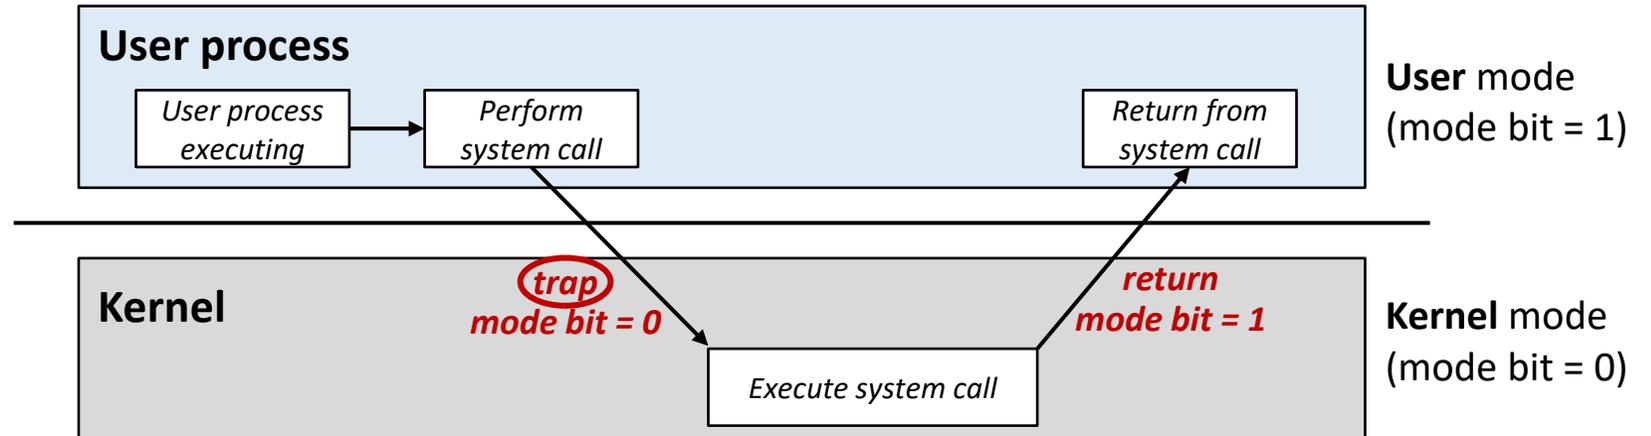


Implementing System Calls

- `count = read(fd, buf, 512);`

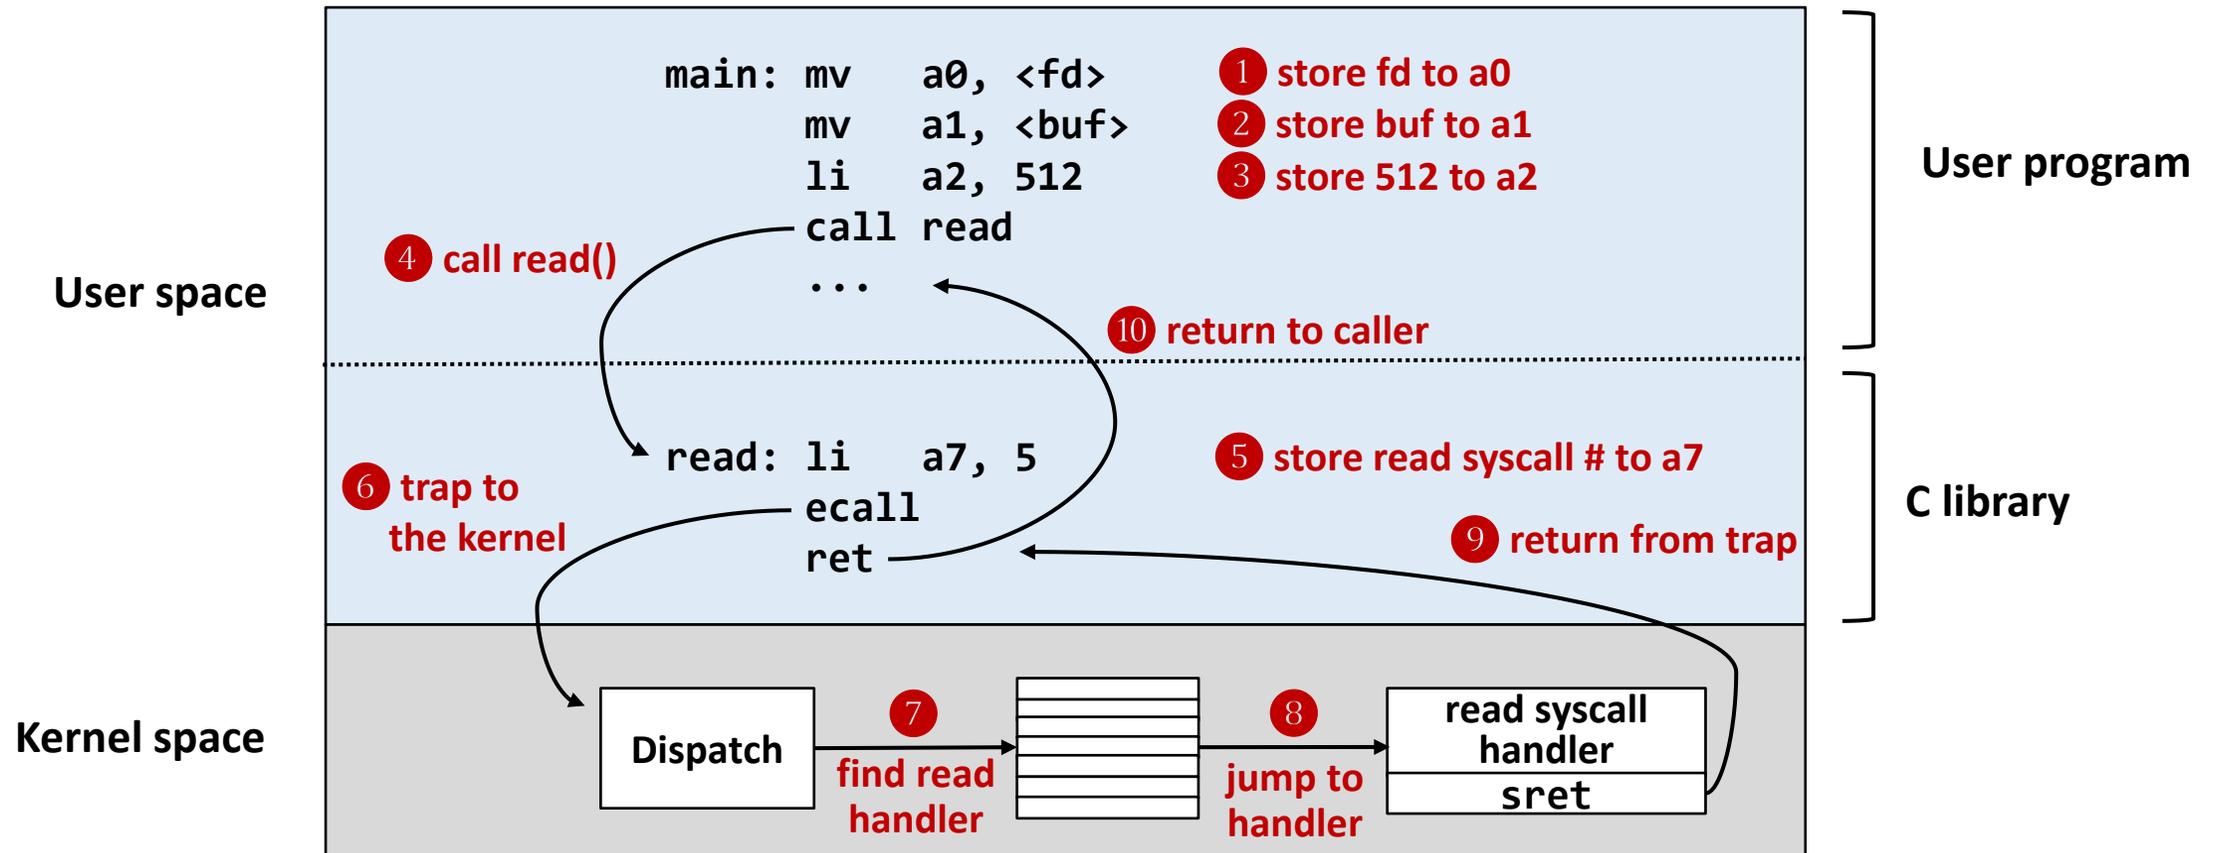

Typical (Monolithic) OS Structure

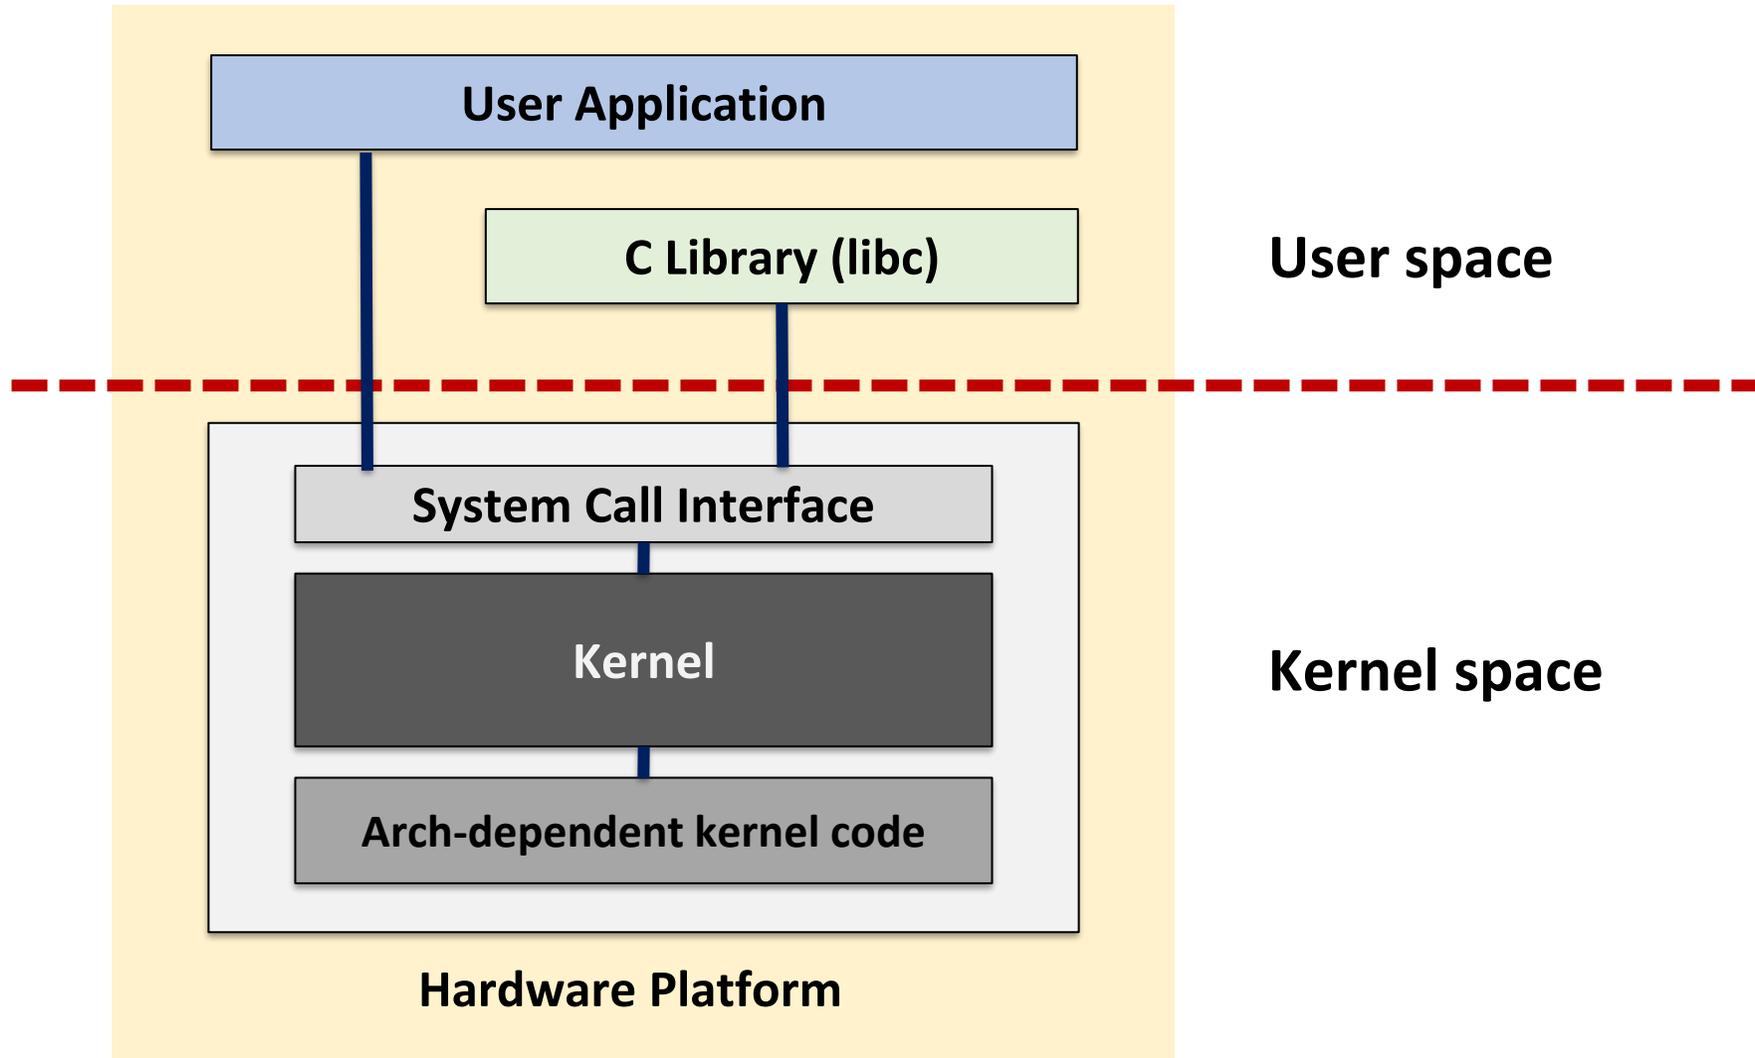

Trap Instructions in x86

- `int 0x80 (+ iret)`
 - "Software interrupt"
 - A legacy way to invoke a system call (used for 32-bit mode)
 - Slow: use the same mechanism as interrupts
- `sysenter (+ sysexit)`
 - A new, fast instruction to invoke a system call in **32-bit mode**
 - Introduced by Intel (not available in 64-bit mode on AMD CPUs)
- `syscall (+ sysret)`
 - Similar to `sysenter`, but used in **64-bit mode**
 - Introduced by AMD (not available in 32-bit mode on Intel CPUs)

syscall

SYSCALL—Fast System Call

Opcode	Instruction	Op/En	64-Bit Mode	Compat/Leg Mode	Description
0F 05	SYSCALL	Z0	Valid	Invalid	Fast call to privilege level 0 system procedures.

- $RCX \leftarrow RIP$
- $RIP \leftarrow MSR_LSTAR$
- $R11 \leftarrow RFLAGS$
- ...
- Initialize CS and SS from MSR_STAR
- Set CPL(Current Privilege Level) to 0

Using a System Call

- Example: `getpid()`

```
#include <sys/types.h>
#include <unistd.h>

int main(void)
{
    return getpid();
}
```

Invoking a System Call

- System call number for getpid(): 0x27 (= 39)

```
0000000004005a0 <main>:
 4005a0: e9 fb 84 04 00      jmpq    448aa0 <__getpid>
 4005a5: 66 2e 0f 1f 84 00 00 nopw    %cs:0x0(%rax,%rax,1)
 4005ac: 00 00 00
 4005af: 90                nop
```

```
000000000448aa0 <__getpid>:
 448aa0: b8 27 00 00 00      mov     $0x27,%eax
 448aa5: 0f 05              syscall
 448aa7: c3                retq
 448aa8: 0f 1f 84 00 00 00 00 nopl   0x0(%rax,%rax,1)
 448aaf: 00
```

In C library

Numbering System Calls

- @ arch/x86/entry/syscalls/syscall_64.tbl

```
#
# 64-bit system call numbers and entry vectors
#
# The format is:
# <number> <abi> <name> <entry point>
#
# The __x64_sys_*() stubs are created on-the-fly for sys_*() system calls
#
# The abi is "common", "64" or "x32" for this file.
#
0 common read      __x64_sys_read
1 common write     __x64_sys_write
2 common open      __x64_sys_open
3 common close     __x64_sys_close
4 common stat      __x64_sys_newstat

...

37 common alarm    __x64_sys_alarm
38 common setitimer __x64_sys_setitimer
39 common getpid    __x64_sys_getpid
40 common sendfile __x64_sys_sendfile64
```

Setting up the System Call Entry

- @ arch/x86/kernel/cpu/common.c

```
void syscall_init(void)
{
    wrmsr(MSR_STAR, 0, ( __USER32_CS << 16 ) | __KERNEL_CS);
    wrmsrl(MSR_LSTAR, (unsigned long)entry_SYSCALL_64);
}
```

Entering the Kernel

- @ arch/x86/entry/entry_64.S

```
SYM_CODE_START(entry_SYSCALL_64)
UNWIND_HINT_EMPTY

swaps
/* tss.sp2 is scratch space. */
movq %rsp, PER_CPU_VAR(cpu_tss_rw + TSS_sp2)
SWITCH_TO_KERNEL_CR3 scratch_reg=%rsp
movq PER_CPU_VAR(cpu_current_top_of_stack), %rsp

/* Construct struct pt_regs on stack */
pushq $__USER_DS /* pt_regs->ss */
pushq PER_CPU_VAR(cpu_tss_rw + TSS_sp2) /* pt_regs->sp */
pushq %r11 /* pt_regs->flags */
pushq $__USER_CS /* pt_regs->cs */
pushq %rcx /* pt_regs->ip */
SYM_INNER_LABEL(entry_SYSCALL_64_after_hwframe, SYM_L_GLOBAL)
pushq %rax /* pt_regs->orig_ax */

PUSH_AND_CLEAR_REGS rax=$-ENOSYS

/* IRQs are off. */
movq %rax, %rdi
movq %rsp, %rsi
call do_syscall_64 /* returns with IRQs disabled */
```

Jumping to the System Call Handler

- @ arch/x86/entry/common.c

```
__visible void do_syscall_64(unsigned long nr, struct pt_regs *regs)
{
    struct thread_info *ti;

    enter_from_user_mode();
    local_irq_enable();
    ti = current_thread_info();
    if (READ_ONCE(ti->flags) & _TIF_WORK_SYSCALL_ENTRY)
        nr = syscall_trace_enter(regs);

    if (likely(nr < NR_syscalls)) {
        nr = array_index_nospec(nr, NR_syscalls);
        regs->ax = sys_call_table[nr](regs);
    }
}
```

System Call Table

- @ arch/x86/entry/syscall_64.c

```
#define __SYSCALL_64(nr, sym) extern long __x64_##sym(const struct pt_regs *);
#include <asm/syscalls_64.h>
#undef __SYSCALL_64

#define __SYSCALL_64(nr, sym) [nr] = __x64_##sym,

asmlinkage const sys_call_ptr_t sys_call_table[__NR_syscall_max+1] = {
    /*
     * Smells like a compiler bug -- it doesn't work
     * when the & below is removed.
     */
    [0 ... __NR_syscall_max] = &__x64_sys_ni_syscall,
#include <asm/syscalls_64.h>
};
```

System Call Handlers

- @ arch/x86/include/generated/asm/syscalls_64.h

```
__SYSCALL_COMMON(0, sys_read)
__SYSCALL_COMMON(1, sys_write)
__SYSCALL_COMMON(2, sys_open)
__SYSCALL_COMMON(3, sys_close)
__SYSCALL_COMMON(4, sys_newstat)
__SYSCALL_COMMON(5, sys_newfstat)
__SYSCALL_COMMON(6, sys_newlstat)
__SYSCALL_COMMON(7, sys_poll)
__SYSCALL_COMMON(8, sys_lseek)
__SYSCALL_COMMON(9, sys_mmap)
__SYSCALL_COMMON(10, sys_mprotect)
__SYSCALL_COMMON(11, sys_munmap)
__SYSCALL_COMMON(12, sys_brk)
__SYSCALL_64(13, sys_rt_sigaction)
__SYSCALL_COMMON(14, sys_rt_sigprocmask)
__SYSCALL_64(15, sys_rt_sigreturn)
__SYSCALL_64(16, sys_ioctl)
```

syscall()

- A generic library function that performs the specified system call
 - Symbolic constants for system call numbers are specified in `<sys/syscall.h>`
 - Useful for a new system call that has no wrapper function in the C library
 - Supports a variable number of arguments

```
#include <stdio.h>
#include <unistd.h>
#include <sys/syscall.h>

int main(void)
{
    printf("%ld\n", syscall(__NR_getpid));
    printf("%ld\n", syscall(SYS_getpid));
}
```



System Call Overheads

■ Problems

- A processor exception is used to communicate with the kernel
- A synchronous execution model is enforced

■ Costs



- Mode switch time (direct)
- Pollution of important processor structures (indirect)

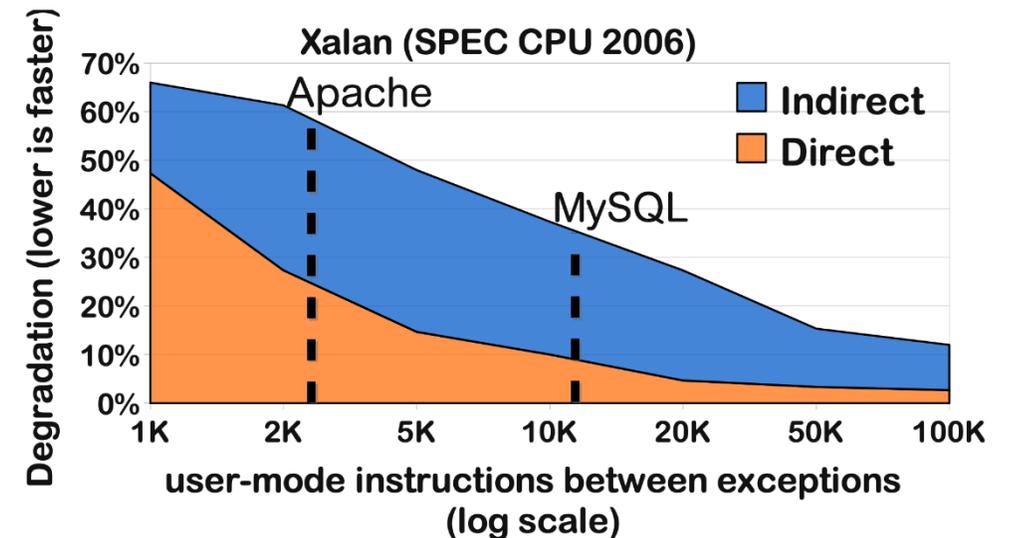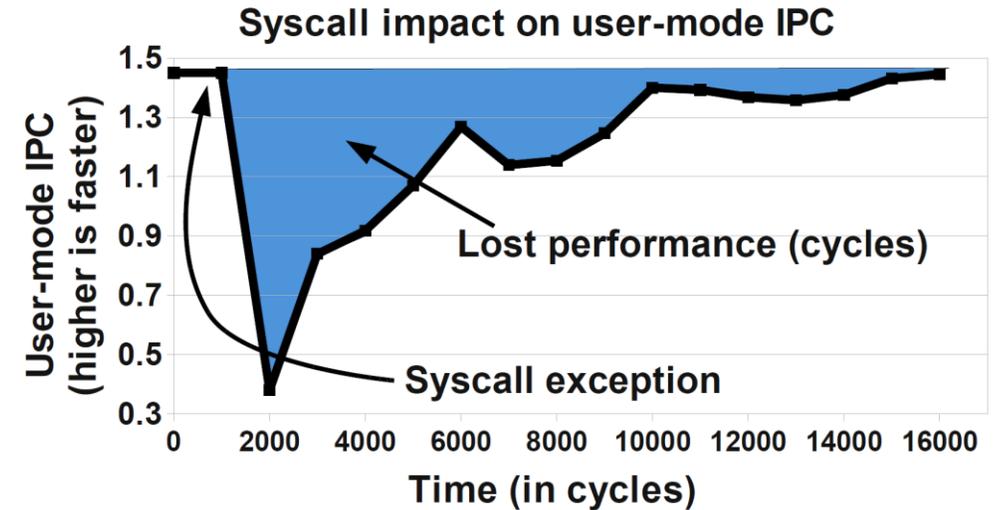

I. Vectored I/O: Batching Requests

■ Scatter/gather I/O

- Reads/writes data into multiple buffers simultaneously
- `readv()`, `writev()`
- `preadv()`, `pwritev()`
- `sendmmsg()`, `recvmmsg()`

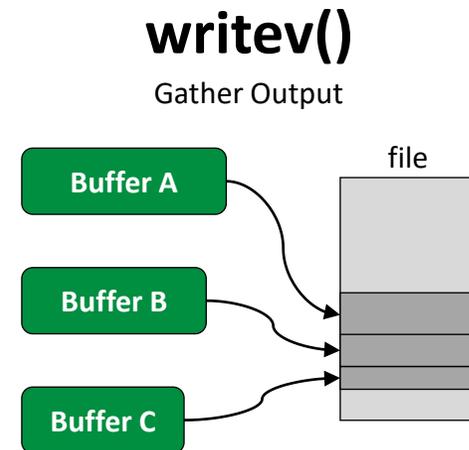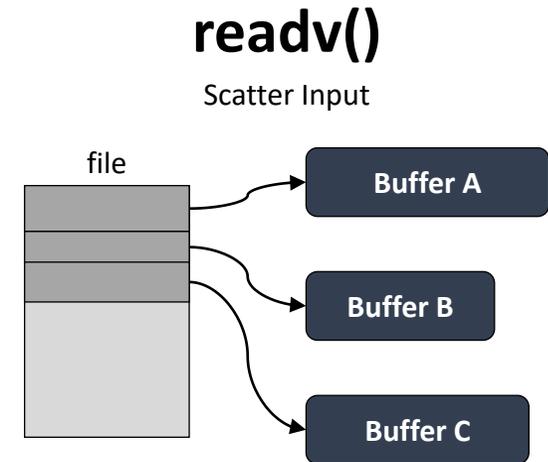

2. vDSO

- **Virtual Dynamic Shared Object (@ arch/x86/entry/vdso/)**
 - A small shared library exported by the kernel that is mapped into the address space of all user-space applications
 - Mapped to a different location every time (for security)
 - Used to accelerate the execution of certain read-only system calls ("virtual system calls") without entering the kernel
 - `clock_gettime()`
 - `gettimeofday()`
 - `getcpu()`
 - `time()`
 - `clock_getres()`
 - `@ arch/x86/entry/vdso`
 - `$ man vdso`

vDSO Layout

```
$ cat /proc/self/maps
5611a0174000-5611a0176000 r--p 00000000 08:05 265118 /usr/bin/cat
5611a0176000-5611a017b000 r-xp 00002000 08:05 265118 /usr/bin/cat
5611a017b000-5611a017e000 r--p 00007000 08:05 265118 /usr/bin/cat
5611a017e000-5611a017f000 r--p 00009000 08:05 265118 /usr/bin/cat
5611a017f000-5611a0180000 rw-p 0000a000 08:05 265118 /usr/bin/cat
5611a1ebb000-5611a1edc000 rw-p 00000000 00:00 0 [heap]
7f9d19bdc000-7f9d19bfe000 rw-p 00000000 00:00 0
7f9d19bfe000-7f9d1ab21000 r--p 00000000 08:05 269248 /usr/lib/locale/locale-archive
7f9d1ab21000-7f9d1ab46000 r--p 00000000 08:05 274111 /usr/lib/x86_64-linux-gnu/libc-2.31.so
7f9d1ab46000-7f9d1acbe000 r-xp 00025000 08:05 274111 /usr/lib/x86_64-linux-gnu/libc-2.31.so
7f9d1acbe000-7f9d1ad08000 r--p 0019d000 08:05 274111 /usr/lib/x86_64-linux-gnu/libc-2.31.so
7f9d1ad08000-7f9d1ad09000 ---p 001e7000 08:05 274111 /usr/lib/x86_64-linux-gnu/libc-2.31.so
7f9d1ad09000-7f9d1ad0c000 r--p 001e7000 08:05 274111 /usr/lib/x86_64-linux-gnu/libc-2.31.so
7f9d1ad0c000-7f9d1ad0f000 rw-p 001ea000 08:05 274111 /usr/lib/x86_64-linux-gnu/libc-2.31.so
7f9d1ad0f000-7f9d1ad15000 rw-p 00000000 00:00 0
7f9d1ad24000-7f9d1ad25000 r--p 00000000 08:05 273898 /usr/lib/x86_64-linux-gnu/ld-2.31.so
7f9d1ad25000-7f9d1ad48000 r-xp 00001000 08:05 273898 /usr/lib/x86_64-linux-gnu/ld-2.31.so
7f9d1ad48000-7f9d1ad50000 r--p 00024000 08:05 273898 /usr/lib/x86_64-linux-gnu/ld-2.31.so
7f9d1ad51000-7f9d1ad52000 r--p 0002c000 08:05 273898 /usr/lib/x86_64-linux-gnu/ld-2.31.so
7f9d1ad52000-7f9d1ad53000 rw-p 0002d000 08:05 273898 /usr/lib/x86_64-linux-gnu/ld-2.31.so
7f9d1ad53000-7f9d1ad54000 rw-p 00000000 00:00 0
7ffe8b35b000-7ffe8b37c000 rw-p 00000000 00:00 0 [stack]
7ffe8b3f3000-7ffe8b3f6000 r--p 00000000 00:00 0 [vvar]
7ffe8b3f6000-7ffe8b3f7000 r-xp 00000000 00:00 0 [vdso]
ffffffff600000-ffffffff601000 --xp 00000000 00:00 0 [vsyscall]
```

vvar and vsyscall

■ vvar


- Mapped just before the vdso page
- Contains data accessed by virtual system calls
- Kernel periodically updates the values (if necessary)
- User-space application can only read the values

■ vsyscall

- A legacy ABI for virtual system calls
- Mapped to the fixed user-space address
- Not recommended to use

3. FlexSC [OSDI '10]


- **Syscall page**
 - Shared memory between user and kernel
 - Decouples invocation from execution
- **Asynchronous execution**
 - In-kernel “syscall threads” pull requests, execute them
 - Post results back asynchronously
- **FlexSC threads**
 - User-level threads intercept legacy system calls
 - No modifications to existing applications

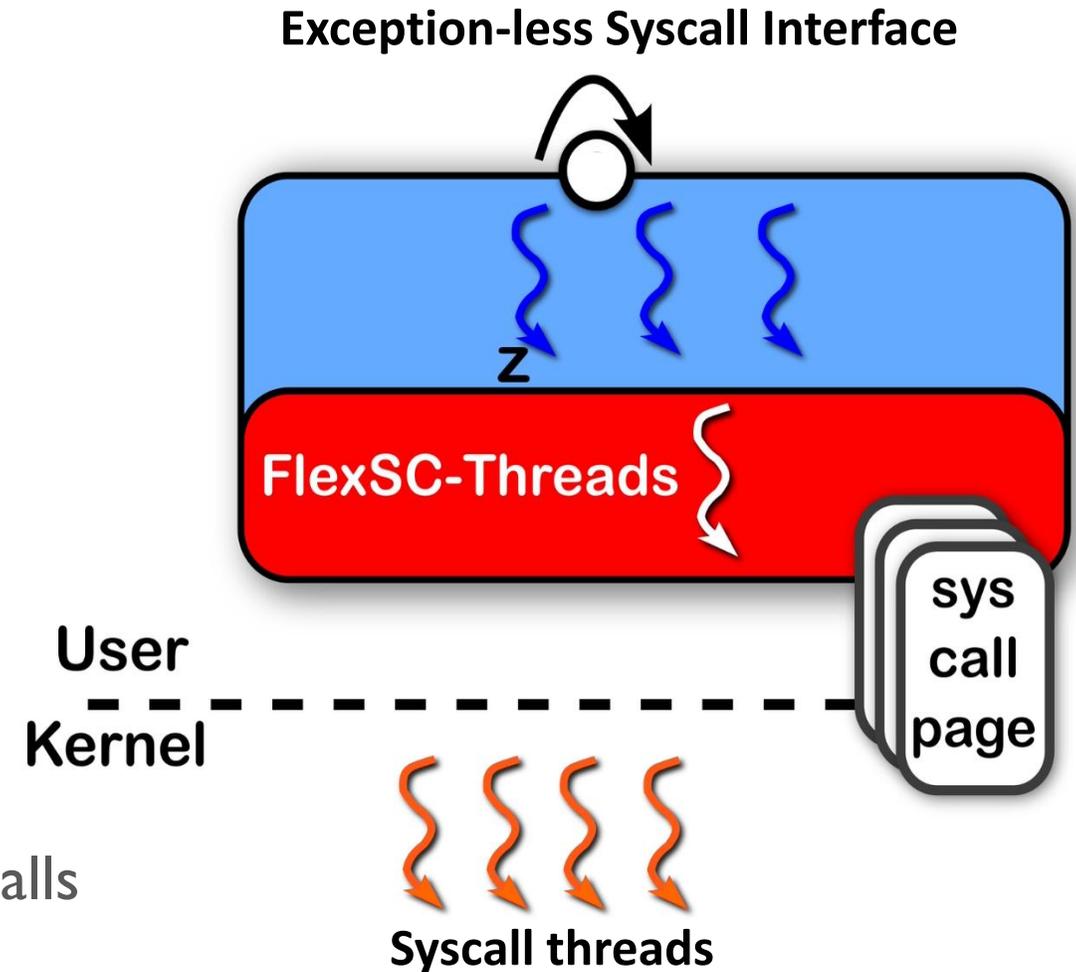

4. io_uring

- Scalable asynchronous I/O infrastructure

- Unified I/O interface: read, write, epoll, libaio, ...
- Asynchronous architecture with shared ring buffers: SQ and CQ
- Batch processing
- Introduced in Linux 5.1

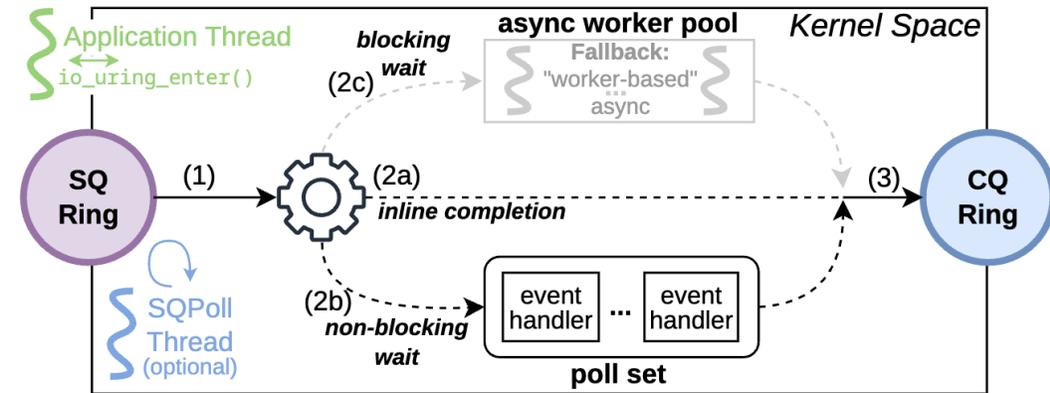

- `io_uring_enter()` syscall: submit and/or wait for completion
- User applications can also poll the CQ for completion
- SQPOLL mode: kernel thread polls SQ, no `io_uring_enter()` needed
- IOPOLL mode: kernel thread polls the device for faster completion

5. Zero-Copy I/O

- Reduce the need to copy data between kernel space and user space
- `sendfile()`
 - File descriptor ↔ socket descriptor
 - No user buffer needed
- `splice()`
 - File descriptor ↔ pipe ↔ file descriptor
 - At least one endpoint must be a pipe
- `vmsplice()`
 - User pages → pipe
 - Maps user-space memory pages directly into a pipe
 - Pipe → user pages: not zero-copy